



**HIGH PERFORMANCE
SPECIALTY CARBON BLACKS FOR
CONDUCTIVE PLASTIC COMPOUNDS**

Technical Information 1490 | EMEA

WHO WE ARE – ORION S.A.

Orion S.A. (Orion) is one of the worlds leading suppliers of carbon black. Orion produces a broad range of carbon black that includes furnace black, high-performance specialty gas black, acetylene black and lamp black. By offering an excellent balance of colorimetric properties, dispersibility, UV-protection, electrical conductivity and adjustment of mechanical and rheological properties they are used in several polymer applications, such as pressure pipes, fibers, cables, films and adhesives.

With over 1600 employees worldwide, Orion operates 15 global production sites and 4 applied technology centers, focusing on quality supply and collaborative partnerships with customers.



INTRODUCTION

Most polymers are insulators. They do not conduct electricity. In many applications, such as electrical appliances, this is a very critical characteristic as it prevents short-circuiting and electrical shocks.

However, insulators can build up static charge leading to undesirable discharges when grounded. These electrostatic discharges are the reason for the unpleasant sparks people often experience in shopping malls, particularly during dry winter-time, but they can also destroy electronic components or even cause fires or explosions, when occurring in explosive atmospheres. Thus, there are numerous applications that require the use of antistatic or conductive materials. They include transport packaging of electronic components or chemicals, cables, floor coverings, conveyor belts, air conduits, as well as hoses in the mining and chemical industry.

The use of conductive or antistatic compounds prevents electrostatic discharges, ensuring safe and long-term use of the final part.

Field examples for end use of conductive or antistatic compounds



Spark discharge flammability, e.g. gas pump nozzle



Transport boards for electronically sensitive devices




Electrical grounding and antistatic flooring



Power cables



Explosion-proof areas, e.g. ATEX



Antistatic packaging films

ELECTRICAL CONDUCTIVITY OF COMPOUNDS

The basic principle of electrical conductivity relies on the flow of charge carriers, e.g. electrons or ions. The ability of a material to transport electrical charges is described by its electrical conductivity. The electrical conductivity is reciprocal to the resistivity. The higher the resistivity, the lower the conductivity.


Generally, polymer compounds are classified in three categories depending on their resistivity:

- Insulating: higher than $10^9 \Omega\text{-cm}$
- Antistatic: between $10^9 \Omega\text{-cm}$ and $10^4 \Omega\text{-cm}$
- Conductive: below $10^4 \Omega\text{-cm}$

While most of the polymers are electrically insulating, carbon blacks themselves are conductive due to their graphitic domains. Their conductivity, however, does not reach the level of metals.

Figure 1

Typical categorization of compounds according to their resistivity

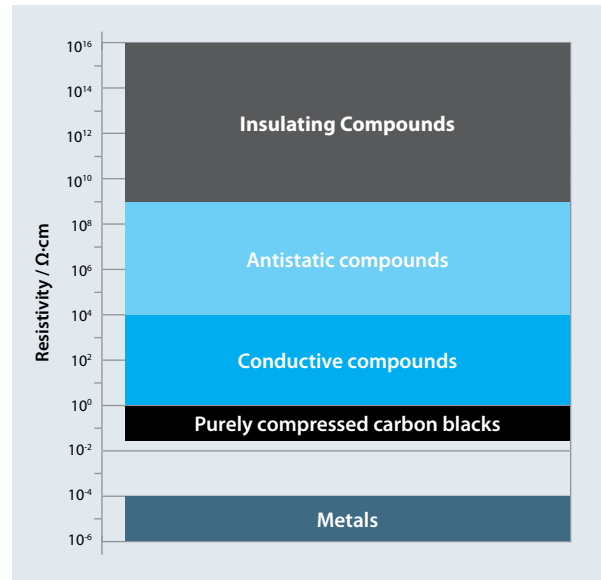

ACHIEVING ELECTRICAL CONDUCTIVITY IN COMPOUNDS

To induce electrical conductivity in compounds, carbon black is added to the polymer matrix. The carbon black aggregates need to build a network to achieve uninterrupted conductive pathways throughout the material for the transfer of electrical charges. The distance between the carbon black aggregates is key to the electrical conductivity of the compound. The smaller the distance and the higher the number of paths formed, the lower the transition resistance and the better the electrical conductivity of the compound. That is, concentration of carbon black is a key parameter in achieving conductivity.

The relation of the carbon black concentration with the resistivity is shown in the percolation curve (Figure 3). It is only after a certain amount of carbon black in the polymer matrix, that the resistivity starts to decrease due to the formation of a continuous carbon black network. After this point, the resistivity decreases by several orders of magnitude (percolation zone) until it asymptotically approaches a minimum which is significantly higher than that of pure compressed carbon black (10^{-1} – $10^0 \Omega\text{-cm}$). That is, the percolation zone is the concentration where the compound passes over from insulative to conductive.

Figure 2

Illustration of carbon black distribution in a polymer compound


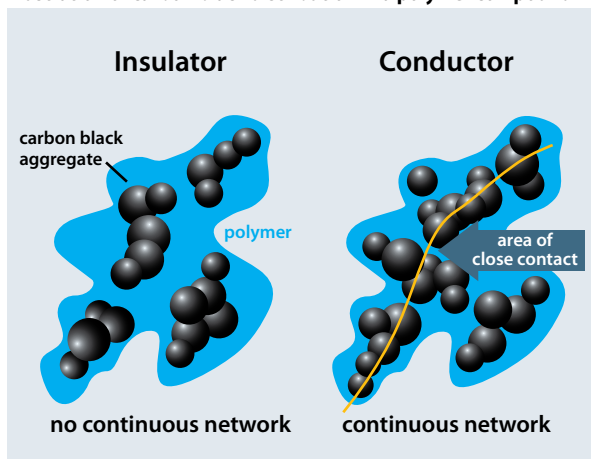


Figure 3

Example of a percolation curve

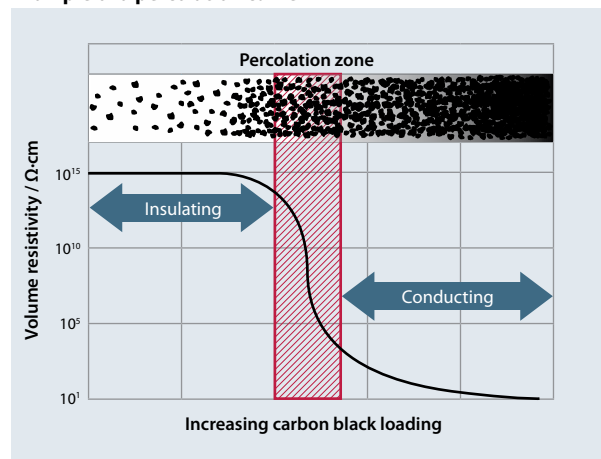

Generally, one of the key objectives is developing conductive compounds with consistent resistivity while keeping a good balance between overall polymer properties.

The conductivity of the final product depends primarily on these factors:

- Carbon black morphology & concentration
- Polymer type and selection
- Dispersion of carbon black in polymer
- Design of final product

CONDUCTIVE CARBON BLACK

Carbon black is extremely well-suited to make plastics conductive. Carbon black is competitively priced, widely applicable, easily processable, stable to aging, safe and largely chemically inert. In principle, every carbon black is electrically conductive. With special conductive carbon blacks, however, it is possible to achieve percolation at low concentration. This has the advantage that other polymer properties, such as processability, mechanics, flowability, specific weight and moisture absorption are less impacted.

Conductive carbon blacks generally display a high specific surface area (small primary particle size) and a very high structure. The higher the surface

Figure 4

Microscopic picture of a carbon black aggregate (smallest dispersible unit)



area of a carbon black the higher the concentration of aggregates per unit volume in the compound. This reduces the distance from one aggregate to the next and, therefore, increases conductivity (figure 5). The very high structure supports the dispersion. The dispersion is essential for an effective build-up of the conductive pathway.

Depending on the further processing and intended use of the conductive polymer compounds (e.g. injection molding, extrusion, blow molding), the requirements for the carbon black can vary greatly. Orion offers in depth expertise and an extensive portfolio of conductive carbon blacks ensuring the best option for each application.

Figure 5

Illustration of the specific surface area at same carbon black weight


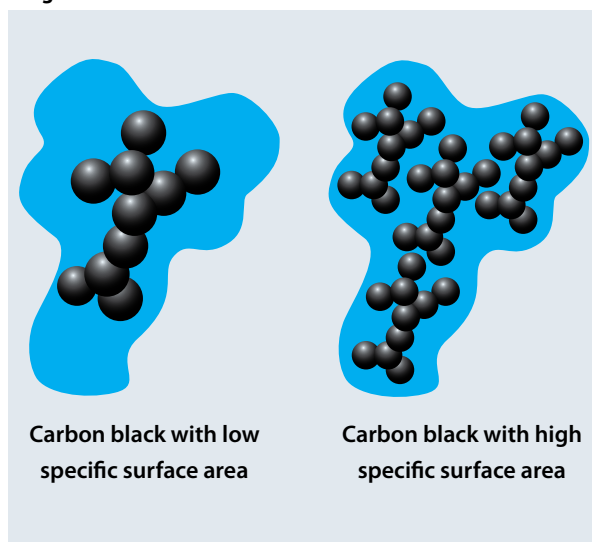


Figure 6

Illustration of low and high structure carbon black

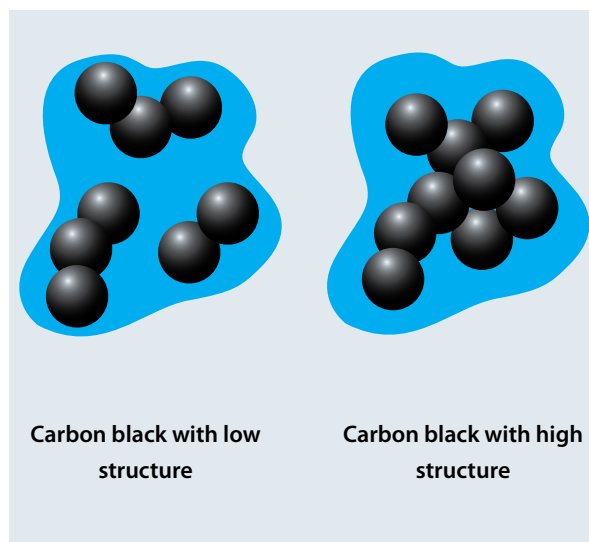

PORTFOLIO OF CONDUCTIVE CARBON BLACKS

Table 1

	APPLICATION		
	DELIVERY FORM	WIRE & CABLE	CONDUCTIVE & ANTISTATIC COMPOUNDS
PRINTEX® HV	Beads		
PRINTEX® MV	Beads		
PRINTEX® kappa 10	Beads		
PRINTEX® kappa 20	Powder		
PRINTEX® kappa 60	Beads		
PRINTEX® kappa 70	Beads		
PRINTEX® kappa 100	Beads & Powder		
PRINTEX® XE2 B	Beads		

Figure 7

Percolation curve of selected conductive carbon blacks in PE-LD

Percolations curves will differ depending on the polymer and process used. Below example of the performance of different conductive carbon blacks in PE-LD injection molded plaques.


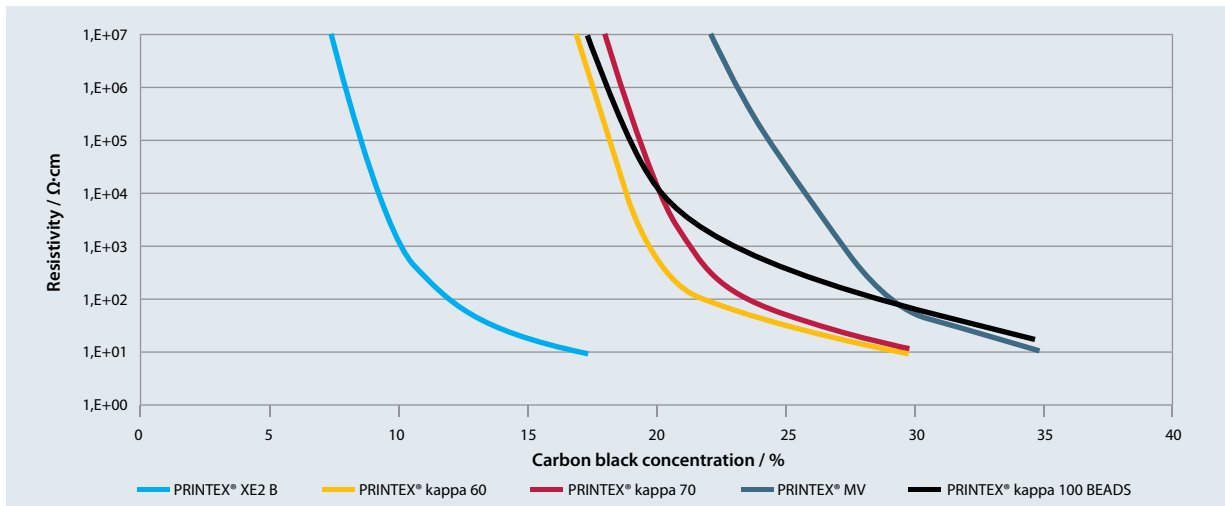


Figure 8

Comparison of selected carbon blacks based on key characteristics relevant for the conductive compound

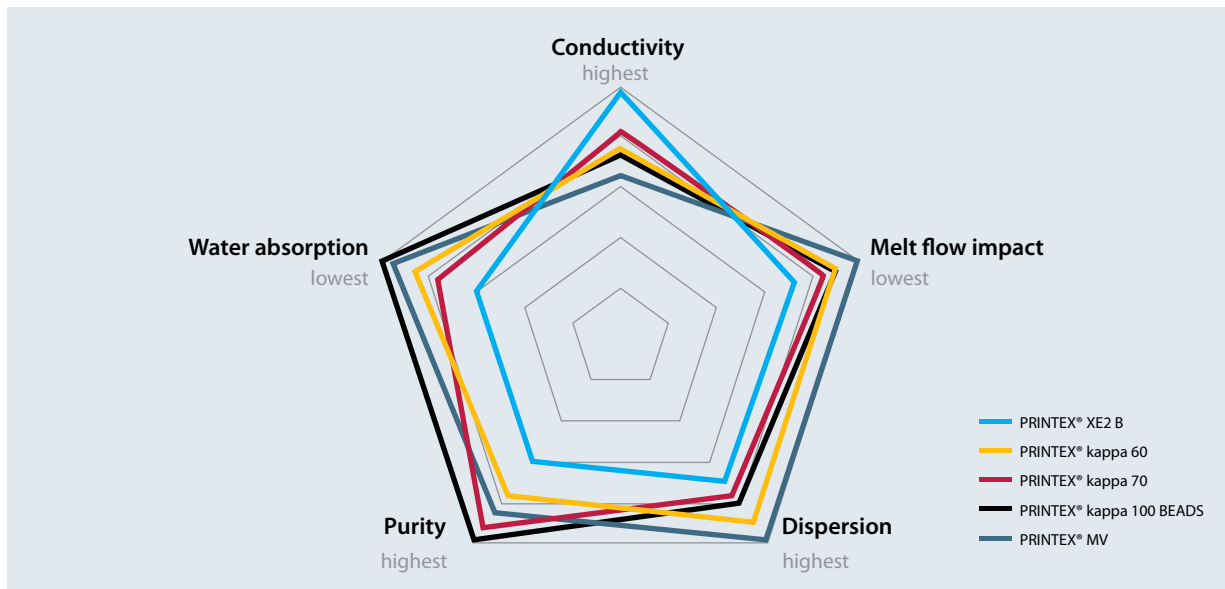

THE AMERICAS

Orion Engineered Carbons LLC
1700 City Plaza Drive, Suite 300
Spring, TX 77389
USA
Phone +1 832 445 3300
AMERICAS@orioncarbons.com

EUROPE/ MIDDLE EAST/ AFRICA

Orion Engineered Carbons GmbH
Frankfurter Straße 60 - 68
65760 Eschborn
Germany
Phone +49 6196 771 929 100
EMEA@orioncarbons.com

ASIA PACIFIC

Orion Engineered Carbons (China) Investment Co., Ltd.
Room 2301, 2302, 2307, BM InterContinental Business Center
100 Yutong Road, Jing'an District, Shanghai 20007
P. R. China
Phone +86 21 6107 0966
APAC@orioncarbons.com

INCORPORATED IN LUXEMBURG

Orion S.A., 6, Route de Trèves, 2633 Senningerberg, Luxembourg, Phone +352 270 48 06 0

All statements and information given herein by Orion Engineered Carbons GmbH as well as its affiliates, including for example **Orion S.A. ("Orion")**, are provided for information purposes only and are provided as of the date of this document. They are based on the knowledge of Orion on the date of the document. ORION DOES NOT GIVE ANY REPRESENTATION OR WARRANTY THAT THE CONTENTS OF THE GIVEN STATEMENTS AND INFORMATION ARE CORRECT OR ACCURATE. ANY LIABILITY OF ORION WITH REGARD TO THE CONTENTS PROVIDED ARE HEREBY EXPRESSLY EXCLUDED. Orion does not give a warranty or makes any representation with respect to any results to be obtained from such statements or information, any uses of such information or with regard to the non-infringement of any proprietary right. Nothing stated herein shall be construed as a license of or recommendation for use, especially with concern to the potential infringement of any proprietary right. Use or application of such information or statements or the material or systems described herein are at user's sole discretion and risk. The user acknowledges that Orion shall bear no responsibility or liability for any use or application of such information or statements or the material or systems described herein. All sales are subject to the respective standard terms and conditions of sale and delivery issued by Orion including but not limited to the limitation of liability contained therein. The Orion standard terms and conditions of sale and delivery (English) can be reviewed, downloaded and printed under

https://orioncarbons.com/legal/compliance-guidelines/#terms_conditions.

Orion reserves the right to modify this document and the respective standard terms and conditions of sale and delivery at any time without prior notice. **Any and all information disclosed by Orion herein shall remain the property of Orion and is protected by copyright and other relevant laws.** All marks (protected indications such as logos and trademarks) contained herein are owned by Orion or third parties associated with Orion and are protected by the relevant trade mark laws; such marks may not be used, reproduced or transmitted for commercial purposes without prior consent by Orion.

© 2024 Orion Engineered Carbons GmbH



www.orionsa.com